

40.05

15

40.02





20

40.09

17

40.15

300

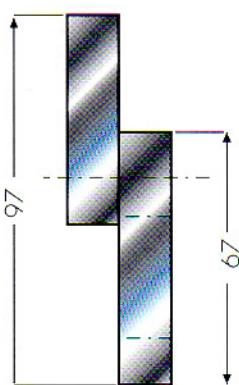





D = 20/25/30/35/40/50/60/80/100

40.14

40.06



40.07/55

40.07/75

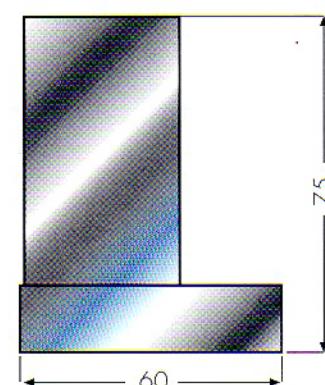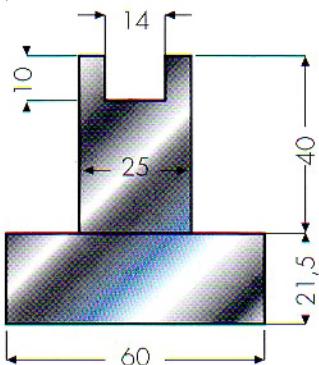

40.03


40.04

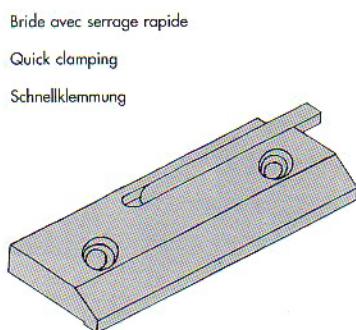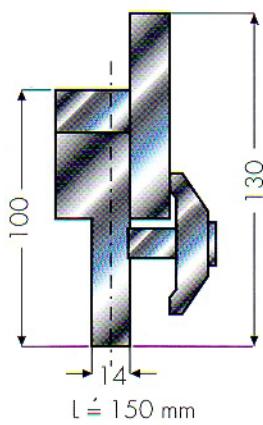

Bride avec serrage rapide

Quick clamping

Schnellklemmung

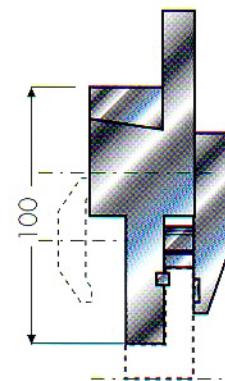

Porte-outil avec serrage hydraulique et compensation avec cales de réglage. longueur standard 150 mm.




Intermediate beam with hidraulic clamping and compensation by means of wedges
Standard length 150 mm.Zwischenstück mit hydraulischer klemmung und Augleihskellen.
Standardlänge 150 mm.

40.20

40.55



55

40.60

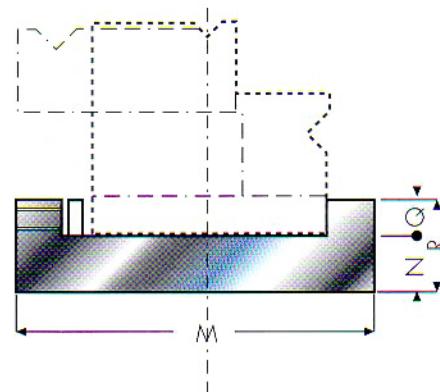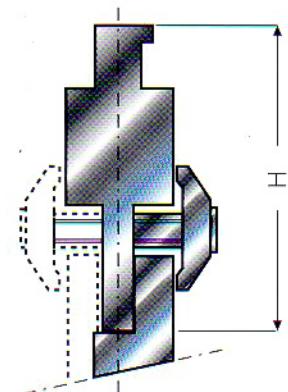

40.10

40.10

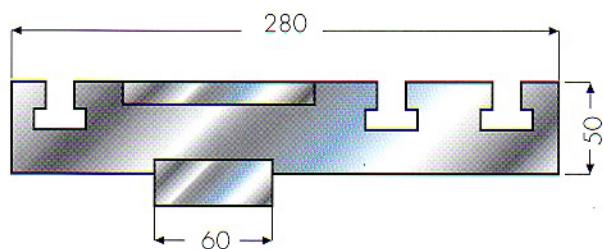

RR 40.00

